Super Bass Extreme Ultra

PROFESSIONAL AUDIO / Hi-FI & HOME CINEMA / PUBLIC SPACES




Description

Optimized for corner mounting, Super Bass Extreme's elegant wooden front is based on Vicoustic's flagship Wave Wood panel. Designed to provide effective low frequency absorption between 60-125 Hz, it delivers maximum effectiveness between 75 -100Hz. The wooden front panel has two functions, providing sufficient mid-high frequency absorption to control corner reflections without deadening the sound, while simultaneously acting as a diffuser.


When porous materials such as foam are applied to corners or walls, they become less efficient in dealing with low frequencies, because the particle velocity or air movement associated with long wavelengths is low. However, the sound pressure is at its maximum and Super Bass Extreme's internal membrane transforms this high pressure fluctuations into air motion. The membrane sympathetically vibrates over a frequency range of 75-100 Hz, causing the air to pass through a layer of high-density foam that absorbs the low frequencies.

Super Bass Extreme is highly recommended for smaller rooms with low frequency issues. The panel can be used in different corner positions and its modular structure allows further units to be added as required.

Performance

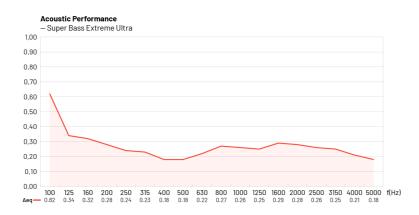

Available Finishes*



* Different batches may show a color variation

Dimensions**

Each panel: 595 x 595 x 169mm* / 23.4" x 23.4" x 6.7"

** For each panel. Please notice that the dimensions of these panels have a tolerance of +/- 2mm

Packing Information

Units per box: 2

Box: 665 X 665 X 400mm / 26.2" x 26.2" x 15.7" Box Gross Weight: 21,4kg / 47,2lb

Technical Information

Material: VicPET Wool, MDF, High-Pressure Laminate (HPL)

Fire Rating:

- Europe: N/A
- USA: N/A

Installation: VicFix J Profile (included), Flexi Glue Ultra or Manually assembled - no tools required

More information:

www.vicoustic.com/products/super-bassextreme-ultra

